



FLOW

Domus Line
design

LED profile for under-cabinet lighting

Materials:

aluminium, polycarbonate,
thermoplastic polymers

Finishes:

aluminium, black matt

Light source:

SMD LED module

Wiring:

NV (for continuous row)



Application type:

under cabinet

Installation:

surface

FLOW is a modular LED profile with an **integrated 220-240 Vac LED converter** for under-cabinet installation. Equipped with diffuser with asymmetrical projection of the light beam, switch and connection system in continuous line.



* values referring to FLOW 1200mm

Colour appearance	warm white
Colour temperature	3000 K
Luminous efficiency	75 lm/W
CRI	Ra ≥ 80



FLOW
with on/off switch





Code	Length	Watt & Volt	Light colour
12933_ *_B	450mm	8W @ 230Vac	warm white
12934_ *_B	600mm	10W @ 230Vac	warm white
12935_ *_B	900mm	15W @ 230Vac	warm white
12936_ *_B	1200mm	18W @ 230Vac	warm white

Code	Finish*
05	aluminium
32	black matt

BUILT-IN LED CONVERTER. POWER CORD TO BE ORDERED SEPARATELY.

230V

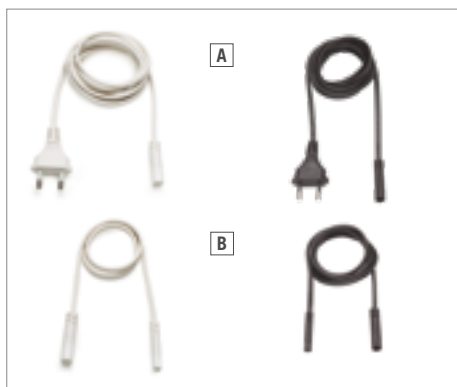

FLOW
cables

Rif.	Code	Model	Length
A	11623_ */200/S	power supply cable	2000mm
B	11624_ */15/S	interconnecting cable	150mm
B	11624_ */50/S	interconnecting cable	500mm
B	11624_ */100/S	interconnecting cable	1000mm

Code	Finish*
01	white
03	black



DETAIL OF THE BACK-TO-BACK CONNECTOR

FLOW can be fitted in continuous rows, thanks to a special **back-to-back connector** integrated in each luminaire.



POWER CORD EXITING PARALLEL

The power cord (supplied separately) can exit the profile radially, axially, in parallel or perpendicularly, making it easier to conceal behind a cabinet.



DETAIL OF THE ON/OFF SWITCH

FLOW is quick and easy to install using the two screws supplied.



POWER CORD EXITING BACK

FINISHES



ALUMINIUM (code 05)



BLACK MATT (code 32)