



FLEXYLED SE H4 PIR

Domus Line
design

Silicone LED profile for recessed installation

Materials:

silicone, thermoplastic polymers

Finishes:

white, black, aluminium

Light source:

HE LED module (120 LED/m)

Wiring:

2000mm



Application type:

inside wardrobe



Installation:

recessed

FLEXYLED SE H4 PIR is a flexible linear side emitting LED profile developed using a new extrusion technology for silicone diffuser materials. **FLEXYLED SE H4 PIR** is installed by pressing it into a groove just 4 mm wide flush to the panel, and has a built-in infra-red sensor which automatically switches on the connected devices when it detects a movement or variation in temperature within the range of action.



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3100 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80

* values referring to FLEXYLED SE H4 PIR 1000mm




FLEXYLED SE H4 PIR
with passive infrared sensor



Code	Length (L)	Length (L1)	Watt & Volt
13332_ _ _**	500mm	588mm	6W @ 12Vdc
13333_ _ _**	1000mm	1088mm	12W @ 12Vdc
13334_ _ _**	1500mm	1588mm	18W @ 12Vdc
13335_ _ _**	2000mm	2088mm	22W @ 12Vdc
13336_ _ _**	2500mm	2588mm	27W @ 12Vdc
13337_ _ _**	3000mm	3088mm	30W @ 12Vdc

Code	Finish (switch) *
01	white
03	black
10	aluminium

Code	Light colour**
N	natural white
B	warm white

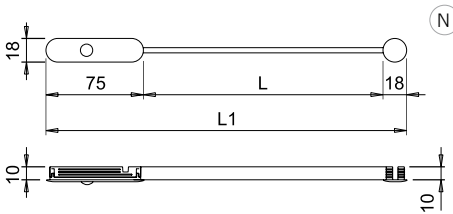

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.





FLEXYLED SE H4 PIR's passive infrared sensor detects movement and temperature changes within a symmetrical cone of around 80 degrees. See the infographic for more details on the operation and correct installation of **FLEXYLED SE H4 PIR**.




INSTALLATION

Thanks to the flexibility of the strip led, **FLEXYLED SE H4 PIR** can be used to install the luminaire in a straight, curved or circular groove or in any other configuration.

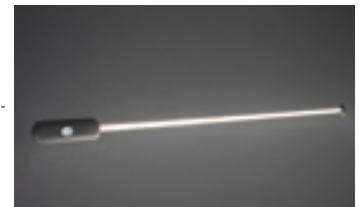

MODULARITY

All **FLEXYLED SE H4 PIR** models can be divided at 25mm intervals.

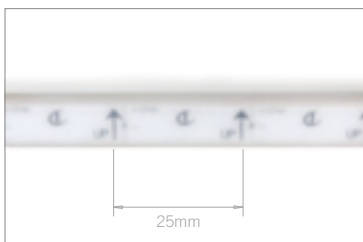

For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.



FINISHES



WHITE (code 01)



BLACK (code 03)



ALUMINIUM (code 10)

¹ For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com.

