



## FLEXYLED SE H4 TD

Domus Line  
design

**Silicone LED profile for recessed installation**

**Materials:**

silicone, thermoplastic polymers

**Finishes:**

white, black, aluminium

**Light source:**

HE LED module (120 LED/m)

**Wiring:**

2000mm



**Application type:**

under shelf



**Installation:**

recessed

**FLEXYLED SE H4 TD** is a flexible linear side emitting LED profile developed using a new extrusion technology for silicone diffuser materials. **FLEXYLED SE H4 TD** is installed by pressing into a groove just 4 mm wide, flush to the panel. It integrates an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".



**Colour appearance** natural white  
**Colour temperature** 4000 K  
**Luminous efficiency** 70 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3100 K  
**Luminous efficiency** 70 lm/W  
**CRI** Ra ≥ 80

\* values referring to FLEXYLED SE H4 TD 1000mm




**FLEXYLED SE H4 TD**  
with touch dimmer switch



Code	Length (L)	Length (L1)	Watt & Volt
13326_ _ _**	500mm	588mm	6W @ 12Vdc
13327_ _ _**	1000mm	1088mm	12W @ 12Vdc
13328_ _ _**	1500mm	1588mm	18W @ 12Vdc
13329_ _ _**	2000mm	2088mm	22W @ 12Vdc
13330_ _ _**	2500mm	2588mm	27W @ 12Vdc
13331_ _ _**	3000mm	3088mm	30W @ 12Vdc

Code	Finish (switch) *
01	white
03	black
10	aluminium

Code	Light colour**
N	natural white
B	warm white

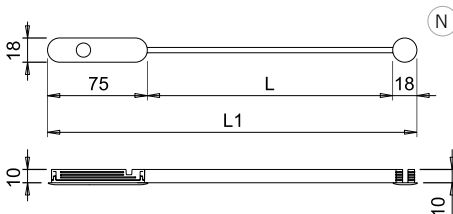

**CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.**




**(N)** This drawing shows the profile's overall dimensions. See installation manual for more details.



**FLEXYLED SE H4 TD** has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".


**INSTALLATION**

Thanks to the flexibility of the strip led, **FLEXYLED SE H4 TD** can be used to install the luminaire in a straight, curved or circular groove or in any other configuration.



**MODULARITY**

All **FLEXYLED SE H4 TD** models can be divided at 25mm intervals.

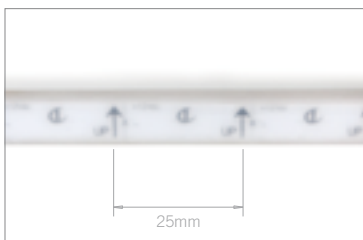

For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on [www.domusline.com](http://www.domusline.com).



**FINISHES**



**WHITE** (code 01)



**BLACK** (code 03)



**ALUMINIUM** (code 10)

<sup>1</sup> For UL-certified model codes, see the **American standard LED collection catalogue**, also available at [www.domusline.com](http://www.domusline.com).

