

This design highlights the profile's overall dimensions. See installation manual for more details.

**Compatible with:**




<b>FLEXYLED HE CR*</b>	54
FLEXYLED CR TW	56
FLEXYLED HE CH 2.0	24
FLEXYLED CH 2.0	26
FLEXYLED UHE6B PW	32
FLEXYLED SHE6B PW	36
FLEXYLED HE6B PW	40
<b>FLEXYLED UHE10 PW*</b>	42
<b>FLEXYLED HE PW*</b>	44
FLEXYLED HE8 TW PW	48
FLEXYLED HE10 TW PW	50

\* Recommended

**ICY**

PMMA and aluminium profile with accessories for recessed installation

Code	Model	Length	Finish
3048101/200	A - Diffuser screen	2000 mm	opaline
3048101/300	A - Diffuser screen	3000 mm	opaline
4112905/200	B - Aluminium profile	2000 mm	aluminium
4112905/300	B - Aluminium profile	3000 mm	aluminium
4006701	C - 2 heads		opaline
4006600	D - 2 springs		

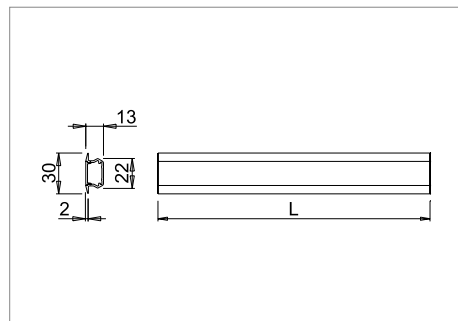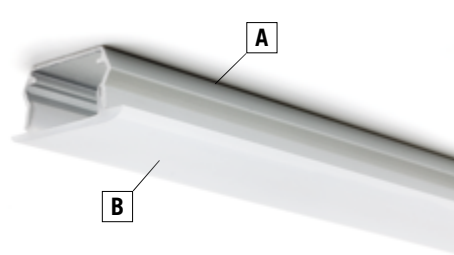

This design highlights the profile's overall dimensions. See installation manual for more details.

**Compatible with:**

<b>FLEXYLED HE CR*</b>	54
FLEXYLED CR TW	56
FLEXYLED HE CH 2.0	24
FLEXYLED CH 2.0	26
FLEXYLED UHE6B PW	32
FLEXYLED SHE6B PW	36
FLEXYLED HE6B PW	40
<b>FLEXYLED UHE10 PW*</b>	42
<b>FLEXYLED HE PW*</b>	44
FLEXYLED HE8 TW PW	48
FLEXYLED HE10 TW PW	50

\* Recommended

**LEDYE**

Aluminium profile and accessories for recessed installation

Code	Model	Length	Finish
4112705/200	A - Aluminium profile	2000 mm	aluminium
4112705/300	A - Aluminium profile	3000 mm	aluminium
3047701/200	B - Diffuser screen	2000 mm	opaline
3047701/300	B - Diffuser screen	3000 mm	opaline
4006510	C - 2 heads		aluminium
4006600	D - 2 springs		

