



BASKI

Domus Line
design

LED profile for drawers and pull-out baskets

Materials:

aluminium, polycarbonate, thermoplastic polymers

Finishes:

aluminium, black matt, dark stainless

Light source:

SHE LED module (55 LED/ft - 180 LED/m)
HE WHC LED module (42 LED/ft - 140 twin LED/m)

Wiring:







79" (2000mm)

Application:

base units with drawers, pull-out baskets or doors

Installation:

to the sides of the cabinet's frame




Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

Colour appearance warm white
Colour temperature 3000 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

Colour appearance super warm white
Colour temperature 2700 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

* values referring to BASKI SHE 47-1/4" (1200mm)

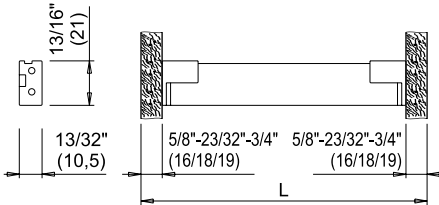

This profile integrates a stripled with OSRAM Opto Semiconductors diodes.



BASKI SHE IR

with proximity sensor/s



Code	Length	Watt & Volt
13318_**_*/SHE	17-11/16" (450mm)	5,8W @ 24Vdc
13319_**_*/SHE	19-11/16" (500mm)	6,5W @24Vdc
13320_**_*/SHE	23-5/8" (600mm)	7,9W @ 24Vdc
13321_**_*/SHE	31-1/2" (800mm) ^N	10,8W @ 24Vdc
13411_**_*/SHE	35-7/16" (900mm) ^N	12,2W @ 24Vdc
13412_**_*/SHE	39-3/8" (1000mm) ^N	13,7W @ 24Vdc
12413_**_*/SHE	47-1/4" (1200mm) ^N	16,6W @ 24Vdc

Code	Finish**
05	aluminium
32	black matt
50	dark stainless


Code	Light colour*
N	natural white
B	warm white
B1	super warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

* configuration with two sensors for units with double doors.



BASKI HE WHC IR integrates a white changeable LED strip which, using the IR sensor, can configure two colour temperatures (NW_natural white and WW_warm white). The selection is memorised and can be changed at any time. The 31-1/2", 35-7/16", 39.3/8" and 47-1/4" (800, 900mm, 1000mm and 1200mm) models integrate two sensors for installation in base units with double doors.

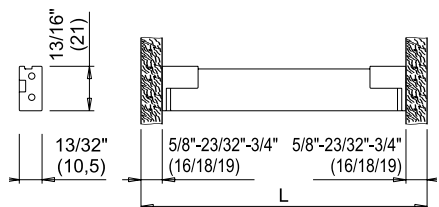

BASKI HE IR WHC

with proximity sensor/s



Code	Length	Watt & Volt
13414_**/HE	17-11/16" (450mm)	3,8W @ 24Vdc
13415_**/HE	19-11/16" (500mm)	4,3W @ "4Vdc
13416_**/HE	23-5/8" (600mm)	5,3W @ 24Vdc
13417_**/HE	31-1/2" (800mm) ^N	7,2W @ 24Vdc
13418_**/HE	35-7/16" (900mm) ^N	8,2 W @ 24Vdc
13419_**/HE	39-3/8" (1000mm) ^N	9,1W @ 24Vdc
13420_**/HE	47-1/4" (1200mm) ^N	11W @ 24Vdc

Code	Finish**
05	aluminium
32	black matt
50	dark stainless

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

* configuration with two sensors for units with double doors.



BASKI SHE IR has an infrared end-stop sensor so that the cabinet interior light switches on and off when the door opens and closes. The sensor's sensitivity depends on the material and finish of the door in front of it. The 31-1/2", 35-7/16", 39.3/8" and 47-1/4" (800, 900mm, 1000mm and 1200mm) models integrate two sensors for installation in base units with double doors.

BASKI is a luminaire designed for application in kitchen base units. It is installed on the side of the frame with thicknesses of 15/8", 23/32", 3/4" (16mm, 18mm, 19mm). The profile integrates one or two sensors to switch it on and off automatically when the door is opened and closed.



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.

FINISHES



ALUMINIUM (code 05)



BLACK MATT (code 32)



DARK STAINLESS (code 50)