

DATE 2.0 OB

design
Domus Line

Surface LED spotlight with asymmetrical beam

Materials:
thermoplastic polymers, PMMA

Finishes
chrome plated, aluminium,
satin nickel, steel







Light source:
SMD LED module

Wiring:
79" (2000mm)

Application type:
universal

Installation:
surface

Patented



Colour appearance natural white
Colour temperature 4300 Kelvin
Luminous flux 390 lm
Luminous efficiency 130 lm/W
CRI Ra ≥ 80

Colour appearance warm white
Colour temperature 3000 Kelvin
Luminous flux 360 lm
Luminous efficiency 120 lm/W
CRI Ra ≥ 80

Colour appearance super warm white
Colour temperature 2700 Kelvin
Luminous flux 360 lm
Luminous efficiency 120 lm/W
CRI Ra ≥ 80




DATE 2.0 OB PLUS



Code	Watt & Volt	Light colour
13653_ _N	3W @ 12Vdc	natural white
13653_ _B	3W @ 12Vdc	warm white
13653_ _B1	3W @ 12Vdc	super warm white

Code	Finish
09	chrome plated
10	aluminium
17	satin nickel
19	steel

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

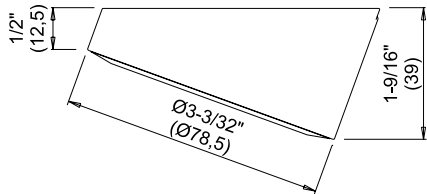

SETS OF 2, 3, 4 OR 5 DATE 2.0 OB PLUS AND LED CONVERTER ARE AVAILABLE ON REQUEST.



DATE 2.0 OB, with 20° inclined support, is installed on surface and against the vertical wall, allowing to easily hide the power cable at the back of the shelf.

DATE 2.0 OB incorporates a high-performance SMD LED module with no-dot effect technology, ensuring a uniform projection beam without the dot effect.

DATE 2.0 OB PLUS features the innovative **Plug&Play system (patented)**, for easy disconnection of the power cord from the spotlight.



FOR LED CONVERTERS AND ACCESSORIES SEE PAGE 200.

FINISHES



CHROME PLATED (code 09)



ALUMINIUM (code 10)



SATIN NICKEL (code 19)



STEEL (code 27)