

## DIVA

Domus Line design

### Recessed aluminium LED profile

**Materials:**

aluminium, polycarbonate, thermoplastic polymers

**Finish:**

aluminium, black matt

**Light source:**

HE LED module (37 LED/ft -120 LED/m)

**Wiring:**



79" (2000mm)

**Application type:**



under cabinet, under shelf

**Installation:**



recessed



**Colour appearance** natural white  
**Colour temperature** 4300 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3100 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** super warm white  
**Colour temperature** 2700 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

\* values referring to DIVA HE 444-11/32" (1126mm)



**DIVA HE**  
without switch




Code	Length	Watt & Volt
13621_**_*/1/HE	14-13/16" (376mm)	3,4W @ 24Vdc
13622_**_*/1/HE	20-23/32" (526mm)	4,8W @ 24Vdc
13623_**_*/1/HE	32-17/32" (826mm)	7,7W @ 24Vdc
13624_**_*/1/HE	44-11/32" (1126mm)	10,6W @ 24Vdc

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

24Vdc



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

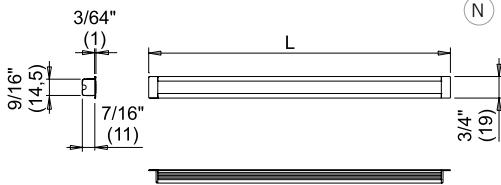

Code	Light colour*
N	natural white
B	warm white
B1	super warm white

Code	Finish**
05	aluminium
32	black matt



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.



**DIVA HE TLD**  
with touch dimmer switch




Code	Length	Watt & Volt
13621_**_*/HE	14-13/16" (376mm)	2,9W @ 24Vdc
13622_**_*/HE	20-23/32" (526mm)	4,3W @ 24Vdc
13623_**_*/HE	32-17/32" (826mm)	7W @ 24Vdc
13624_**_*/HE	44-11/32" (1126mm)	10,1W @ 24Vdc

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

24Vdc



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

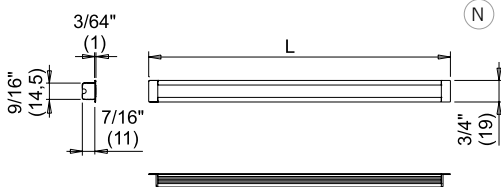

Code	Light colour*
N	natural white
B	warm white
B1	super warm white

Code	Finish**
05	aluminium
32	black matt

DIVA is a minimal recessed profile only 15/32" (12mm) deep and 9/16" (14.5mm) wide. It can be combined with an electronic dimmer switch to turn the luminaire on and off and adjust its brightness.



DIVA is a minimal, symmetrically projecting profile for recessed installation in a groove only 15/32" (12mm) deep. It is supplied as standard with a 79" (2000mm) power cord and Micro24 polarised connector, which may exit the support radially or axially.



**Touch dimmer switch**  
DIVA HE TLD integrates an electronic touch switch which turns the luminaire on and off and adjusts its brightness "at a touch".

**FINISHES**



ALUMINIUM (code 05)



BLACK MATT (code 32)



## DIVA IFR

Domus Line design

### Recessed aluminium LED profile with presence sensor

#### Materials:

aluminium, polycarbonate, thermoplastic polymers

#### Finish:

aluminium, black matt

#### Light source:

HE LED module (37 LED/ft -120 LED/m)

#### Wiring:







79" (2000mm)

#### Application type:

inside cabinet

#### Installation:

horizontal recessed



**Colour appearance** natural white  
**Colour temperature** 4300 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** warm white  
**Colour temperature** 3100 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** super warm white  
**Colour temperature** 2700 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

\* values referring to DIVA HE 44-11/32\* (1126mm)



**DIVA HE IFR**  
with presence sensor



Code	Length	Watt & Volt
13625_**_*/HE	14-13/16" (376mm)	2,9W @ 24Vdc
13626_**_*/HE	20-23/32" (526mm)	4,3W @ 24Vdc
13627_**_*/HE	32-17/32" (826mm)	7W @ 24Vdc
13628_**_*/HE	44-11/32" (1126mm)	10,1W @ 24Vdc

Code	Light colour*
N	natural white
B	warm white
B1	super warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



**N** This drawing shows the profile's overall dimensions. See installation manual for more details.

Code	Finish**
05	aluminium
32	black matt



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.



**DIVA HE IFR's** passive infrared sensor detects movement and temperature changes within a symmetrical cone of around 80 degrees.

See the infographic for more details on the operation and correct installation of **DIVA HE IFR**.



**DIVA IFR** is a minimal recessed profile for grooves only 15/32" (12mm) deep and 9/16" (14.5mm) wide. It incorporates a PIR presence sensor for use inside a cabinet or wardrobe, which switches the luminaire on and off automatically.

**FINISHES**



**ALUMINIUM** (code 05)



**BLACK MATT** (code 32)