



## FLEXYLED HE6B PW

Domus Line design

**Flexible pre-wired LED modules to be integrated**

**Materials:**

flexible LED strip with adhesive

**Covering:**

high reflectance paint

**Light source:**

static light LED module



**Application type:**

universal



**Installation:**

surface or integrated into the profiles



**FLEXYLED HE6B PW** is an LED strip with **37 LED/ft (120 LED/m)** on a circuit of only **1/4" (6 mm)** wide. It is supplied with a **high adherence 3M®** adhesive base so it can be installed into profiles with a removable diffuser. These modules are designed with **reinforced soldered power supply cable terminals** which ensure good solidity.



**Colour appearance** natural white  
**Colour temperature** 4200 Kelvin  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3100 Kelvin  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80




**Colour appearance** super warm white  
**Colour temperature** 2700 Kelvin  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

\* values refer to FLEXYLED HE6B PW PRO 39-3/8" (1000mm)

### TECHNICAL DATA

<b>Power</b>	2.9W/ft (9.6W/m)
<b>Power supply</b>	24Vdc
<b>LEDs/ft (LEDs/metre)</b>	37 (120)
<b>Divisibility</b>	1-31/32" (5cm) - 6 LED
<b>Cable</b>	79" (2000mm)
<b>Protection</b>	IP20
<b>Adhesive 3M®</b>	yes

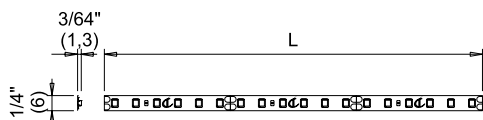

**FLEXYLED HE6B PW PRO**

modules with 37 LED/ft (120 LED/metre)



Code	Length	Watt & Volt	Light colour	LED
1382201N/HE	3.3 ft (1m)	9,6W @ 24Vdc	natural white	120
1382201B/HE	3.3 ft (1m)	9,6W @ 24Vdc	warm white	120
1382201B1/HE	3.3 ft (1m)	9,6W @ 24Vdc	super warm white	120
1382301N/HE	6.6 ft (2m)	19,2W @ 24Vdc	natural white	240
1382301B/HE	6.6 ft (2m)	19,2W @ 24Vdc	warm white	240
1382301B1/HE	6.6 ft (2m)	19,2W @ 24Vdc	super warm white	240
1382401N/HE	8.2 ft (2.5m)	24W @ 24Vdc	natural white	300
1382401B/HE	8.2 ft (2.5m)	24W @ 24Vdc	warm white	300
1382401B1/HE	8.2 ft (2.5m)	24W @ 24Vdc	super warm white	300
1382501N/HE	9.8 ft (3m)	28,8W @ 24Vdc	natural white	360
1382501B/HE	9.8 ft (3m)	28,8W @ 24Vdc	warm white	360
1382501B1/HE	9.8 ft (3m)	28,8W @ 24Vdc	super warm white	360

**LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.**



This profile integrates a stripled with OSRAM Opto Semiconductors diodes.





**Compatible with:**

DIVA	_____	134
GOCCIA	_____	138
ICY	_____	134
KOB	_____	138
LEDYE	_____	135
MICY	_____	135
THEA	_____	136
TWIG	_____	137
TWIG XO	_____	137
TWIG XA	_____	136



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.