



FLEXYLED UHE6 PW

Domus Line design

Flexible pre-wired sliding LED modules

Materials:

flexible LED strip without adhesive

Covering:

high reflectance paint

Light source:

static light LED module



Application type:

universal



Installation:

slide inside small profiles

FLEXYLED UHE6 PW is an LED strip with **85 LED/ft (280 LED/m)** on a circuit of only **1/4" (6 mm) wide**. Developed to be integrated "sliding" within small profiles (e.g. APEX), it is supplied in modules of 3.3 ft (1m), 6.6 ft (2m), 8.2 ft (2.5m) and 9.8 ft (3m) with power supply and connector (pre-wired). These modules are designed with **reinforced soldered power supply cable terminals** which ensure good solidity.



Colour appearance natural white
Colour temperature 4000 Kelvin
Luminous efficiency 82 lm/W
CRI Ra ≥ 80




Colour appearance warm white
Colour temperature 3000 Kelvin
Luminous efficiency 82 lm/W
CRI Ra ≥ 80

* values refer to FLEXYLED UHE6 PW 39-3/8" (1000mm)

TECHNICAL DATA

Power	3W/ft (10W/m)
Power supply	24Vdc
LEDs/ft (LEDs/metre)	85 (280)
Divisibility	63/64" (2,5cm) - 7 LED
Cable	79" (2000mm)
Protection	IP20
Adhesive 3M®	no

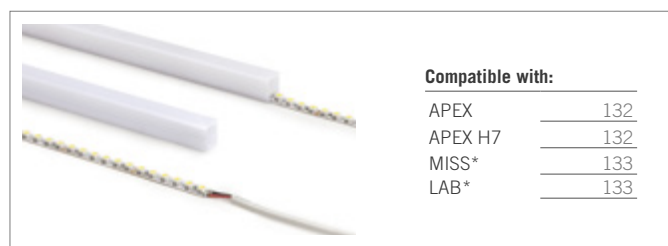

Compatible with:	
APEX	132
APEX H7	132
MISS*	133
LAB*	133

* can integrate APEX profile




FLEXYLED UHE6 PW

modules with 85 LED/7ft (280 LED/metre)

Code	Length	Watt & Volt	Light colour	LED
1349301N/UHE	3.3 ft (1m)	10W @ 24Vdc	natural white	280
1349301B/UHE	3.3 ft (1m)	10W @ 24Vdc	warm white	280
1349401N/UHE	6.6 ft (2m)	20W @ 24Vdc	natural white	560
1349401B/UHE	6.6 ft (2m)	20W @ 24Vdc	warm white	560
1349501N/UHE	8.2 ft (2.5m)	25W @ 24Vdc	natural white	700
1349501B/UHE	8.2 ft (2.5m)	25W @ 24Vdc	warm white	700
1349601N/UHE	9.8 ft (3m)	30W @ 24Vdc	natural white	840
1349601B/UHE	9.8 ft (3m)	30W @ 24Vdc	warm white	840

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

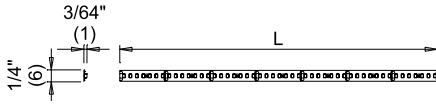

FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.