



KOBI

design
DOMUS Line

LED profile for bathroom mirror

Materials:

aluminium, PMMA

Finishes:

polished aluminium

Light source:

SMD LED module

Connector:

Micro24

Wiring:



79" (2000mm)

Application type:



bathroom mirrors

Installation:

on mirror edge



Colour appearance	natural white
Colour temperature	4300 K
Luminous efficiency	85 lm/W
CRI	Ra ≥ 80



Colour appearance	warm white
Colour temperature	3100 K
Luminous efficiency	85 lm/W
CRI	Ra ≥ 80

* values referred to KOBI HE 39-3/8" (1000mm)



KOBi HE


for installation on mirrors



Code	Model	Length	Watt & Volt
12750_*_**/HE	37 LED/ft (120 LED/m)	23-5/8" (600mm)	5,3W @ 24Vdc
12751_*_**/HE	37 LED/ft (120 LED/m)	25-19/32" (650mm)	5,8W @ 24Vdc
12752_*_**/HE	37 LED/ft (120 LED/m)	27-9/16" (700mm)	6,2W @ 24Vdc
12753_*_**/HE	37 LED/ft (120 LED/m)	31-1/2" (800mm)	7,2W @ 24Vdc
12754_*_**/HE	37 LED/ft (120 LED/m)	35-7/16" (900mm)	8,2W @ 24Vdc
12755_*_**/HE	37 LED/ft (120 LED/m)	39-3/8" (1000mm)	9,1W @ 24Vdc

Code	Finish*
09A	polished aluminium
46	black touch



Code	Light colour**
NP	natural white
BP	warm white

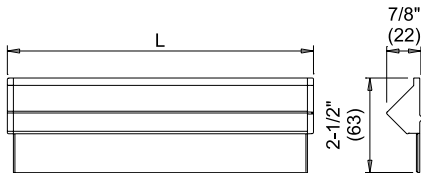

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



Upon request KOBi is available with customized length.

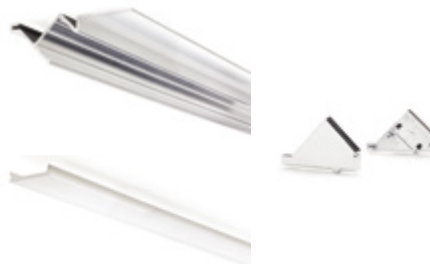

The KOBi profile along with the relative customisation accessories (screen and heads) is also available. See page 138.

FINISHES



POLISHED ALUMINIUM (code 09A)



BLACK TOUCH (code 46)



FOR LED CONVERTERS AND ACCESSORIES SEE PAGE 200.