



## SMALLY XS OB

design  
Domus Line

### Surface LED spotlight with asymmetrical beam

**Materials:**

thermoplastic polymers, PMMA

**Finish:**

chrome plated, aluminium,  
satin nickel, steel, black touch,  
white matt

**Light source:**

SMD LED module

**Wiring:**

79" (2000mm)







**Application type:**

universal

**Installation:**

surface

Patented



**Colour appearance** natural white  
**Colour temperature** 4300 Kelvin  
**Luminous flux** 390 lm  
**Luminous efficiency** 130 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** warm white  
**Colour temperature** 3000 Kelvin  
**Luminous flux** 360 lm  
**Luminous efficiency** 120 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** super warm white  
**Colour temperature** 2700 Kelvin  
**Luminous flux** 360 lm  
**Luminous efficiency** 120 lm/W  
**CRI** Ra ≥ 80




SMALLY XS OB PLUS



Code	Watt & Volt	Light colour
13646_ _N	3W @ 12Vdc	natural white
13646_ _B	3W @ 12Vdc	warm white
13646_ _B1	3W @ 12Vdc	super warm white

Code	Finish
09	chrome plated
10	aluminium
17	satin nickel
19	steel
46	black touch
54	white matt

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

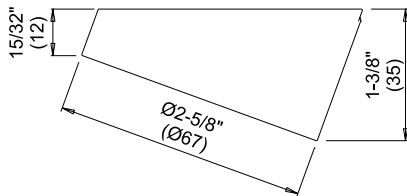

SETS OF 2, 3, 4 OR 5 SMALLY XS OB PLUS AND LED CONVERTER ARE AVAILABLE ON REQUEST.



SMALLY XS OB, with 20° inclined support, is installed on surface and against the vertical wall, allowing to easily hide the power cable at the back of the shelf. SMALLY XS OB incorporates a high-performance SMD LED module with **no-dot effect technology**, ensuring a uniform projection beam without the dot effect. SMALLY XS OB PLUS features the innovative **Plug&Play system (patented)**, for easy disconnection of the power cord from the spotlight.



FOR LED CONVERTERS AND ACCESSORIES SEE PAGE 200.

FINISHES



CHROME PLATED (code 09)



ALUMINIUM (code 10)



SATIN NICKEL (code 17)



STEEL (code 19)



BLACK TOUCH (code 46)



WHITE MATT (code 54)