



## THEA

Domus Line design

### Surface aluminium LED profile

**Materials:**

aluminium, polycarbonate, thermoplastic polymers

**Finish:**

aluminium, black matt, dark stainless

**Light source:**

SHE LED module (55 LED/ft - 180 LED/m)

**Wiring:**







79" (2000mm)

**Application type:**

under cabinet

**Installation:**

surface



**Colour appearance** natural white  
**Colour temperature** 4000 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** warm white  
**Colour temperature** 3000 K  
**Luminous efficiency** 85 m/W  
**CRI** Ra ≥ 80

**Colour appearance** warm white  
**Colour temperature** 2700 K  
**Luminous efficiency** 85 m/W  
**CRI** Ra ≥ 80

\* values referring to THEA SHE 47-1/4" (1200mm)



**THEA SHE**


without sensor



Code	Length	Watt & Volt
13230__**_*/1	17-11/16" (450mm)	6,2W @ 24Vdc
13231__**_*/1	23-5/8" (600mm)	8,2W @ 24Vdc
13232__**_*/1	31-1/2" (800mm)	11W @ 24Vdc
13233__**_*/1	35-7/16" (900mm)	12,5W @ 24Vdc
13234__**_*/1	39-3/8" (1000mm)	13,9W @ 24Vdc
13235__**_*/1	47-1/4" (1200mm)	16,8W @ 24Vdc

Code	Finish**
05	aluminium
32	black matt
50	dark stainless

Code	Light colour*
N	natural white
B	warm white

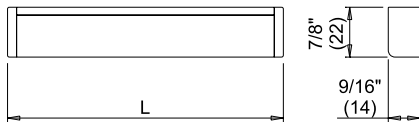

**BUILT-IN LED CONVERTER.**

**POWER CORD TO BE ORDERED SEPARATELY.**



This profile integrates a stripled with OSRAM Opto Semiconductors diodes.



**THEA SHE TD**


with touch dimmable switch



Code	Length	Watt & Volt
13230__**_*	17-11/16" (450mm)	6,2W @ 24Vdc
13231__**_*	23-5/8" (600mm)	8,2W @ 24Vdc
13232__**_*	31-1/2" (800mm)	11W @ 24Vdc
13233__**_*	35-7/16" (900mm)	12,5W @ 24Vdc
13234__**_*	39-3/8" (1000mm)	13,9W @ 24Vdc
13235__**_*	47-1/4" (1200mm)	16,8W @ 24Vdc

Code	Finish**
05	aluminium
32	black matt
50	dark stainless

Code	Light colour*
N	natural white
B	warm white

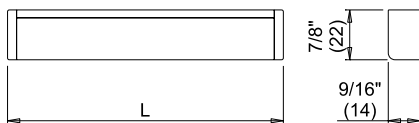

**BUILT-IN LED CONVERTER.**

**POWER CORD TO BE ORDERED SEPARATELY.**



This profile integrates a stripled with OSRAM Opto Semiconductors diodes.



**THEA TD with touch dimmer switch**

**THEA TD** has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".



**THEA** is installed to the surface using special concealed clips

**THEA** is a profile with asymmetric light-beam projection designed for under-cabinet surface installation against the wall. Available in the SHE version (180 LED/m), **THEA** is provided with hidden fixing clips and power cord with back exit.



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.

**FINISHES**



**ALUMINIUM** (code 05)



**BLACK MATT** (code 32)



**DARK STAINLESS** (code 50)