



## TWIG XO

Domus Line  
design

### Surface LED profile with diffuse light projection

#### Materials:

aluminium, PMMA, thermoplastic polymers

#### Finish:

aluminium

#### Light source:

HE LED module (37 LED/ft - 120 LED/m)

UHE LED module (85 LED/ft - 280 LED/m)

#### Wiring:







79" (2000mm)

#### Application type:

under shelf

#### Installation:

surface




**Colour appearance** natural white  
**Colour temperature** 4100 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** warm white  
**Colour temperature** 2900 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

**Colour appearance** super warm white\*\*  
**Colour temperature** 2700 K  
**Luminous efficiency** 85 lm/W  
**CRI** Ra ≥ 80

\*\* Available only for HE (120 LEDs /m)

\* values referring to TWIG XO HE 39-3/8" (1000mm)

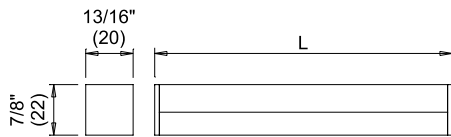

**TWIG XO**

without switch



Code	Model	Watt & Volt
on request*	HE (37 LED/ft - 120 LED/m)	2,9W/ft (9,6W/m) @ 24Vdc
on request*	UHE (85 LED/ft - 280 LED/m)	3W/ft (10W/m) @ 24Vdc

**CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.**

\* Codes will be provided according to the length requested.



**TWIG XO** is available in 37 LED/ft (120 LED/metre) or 85 LED/ft (280 LED/metre) versions, in natural white and warm white. It can be controlled using a remote dimmer system. See accessories on page 200.

**TWIG XO** quickly attaches to the surface using steel clips hidden on the back of the profile.



FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.

**TWIG XO** is a profile for professional applications requiring bright and diffuse illumination. Made from extruded aluminium, it incorporates a high-efficiency PMMA diffuser for even light projection.