



TYNN

Domus Line design

Surface aluminium LED profile

Materials:

aluminium, silicone

Finishes:

aluminium, black matt

Light source:

HE LED module (120 LED/m)

Wiring:

2000mm



Application type:

under shelf



Installation:

surface

TYNN is designed for surface under shelf application and the design of the profile, **inclined at 20°**, guarantees adequate light projection. TYNN **integrates FLEXILED SE H4**, a flexible side-projection linear LED strip (Side-Emitting) developed with a new extrusion technology of diffusing silicone materials. The length of this luminous profile can be customized on request, from min. 300mm to max. 3000mm. Installation is simple and quick with the help of screws supplied.



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3100 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80

* values referring to FLEXILED SE H4 1000mm

A PRODUCT AVAILABLE. VALIDATED TECHNICAL AND PHOTOMETRIC DATA.




TYNN

Aluminium profile for surface installation

Code	Model	Length
41365_*/200	Aluminium profile	2000mm
41365_*/300	Aluminium profile	3000mm

Code	Finish*
05	aluminium
32	black matt

TYNN IS AN ALUMINIUM PROFILE THAT INTEGRATES FLEXYLED SE H4

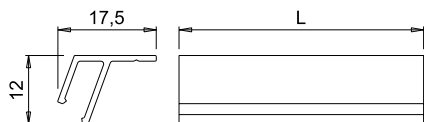

FLEXYLED SE H4



120 LED/m modules - with double power cable


Code	Length	Watt & Volt
1354901_**/100	1000mm	12W @ 12Vdc
1354901_**/200	2000mm	22W @ 12Vdc
1354901_**/250	2500mm	27W @ 12Vdc
1354901_**/300	3000mm	30W @ 12Vdc

Code	Light colour**
N	natural white
B	warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



^(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

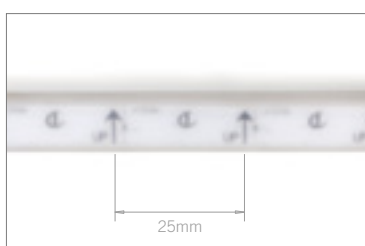

MODULARITY

FLEXYLED SE H4 can be divided at 25mm intervals.

The **FLEXYLED SE H4** divisibility every 25mm **allows combinations with the TYNN profile of any length**. The configuration with double power cable allows to recover the cut part of any of the original modules (for example a 2000mm module shortened to 1500mm allows to recover a 500mm module).

For LED converters and accessories consult the **Domus Extra catalogue** also available on www.domusline.com.



FINISHES



ALUMINIUM (code 05)



BLACK MATT (code 32)

¹ For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com.

