

APEX 79

Domus Line
design

LED profile in polycarbonate for recessed installation

Materials:

polycarbonate, thermoplastic polymers

Finishes:

white

Light sources:

UHE LED module (280 LED/m)

Wiring:

2000mm


Application type:

under cabinet, under shelf


Installation:

recessed

APEX 79 is designed for recessed installation using a **blind groove 9 mm wide and 7 mm deep**. Its length can be adapted to your needs, with a minimum of 300 mm and a maximum of 3000 mm. **APEX 79** is equipped with a smart fitting system using a steel clip with lateral pressure, which also makes it easy to remove from the panel. **APEX 79** is recommended for horizontal application under units, in book cases and under shelves.



Colour appearance natural white
Colour temperature 4000
Luminous efficiency 82 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3000 K
Luminous efficiency 82 lm/W
CRI Ra ≥ 80

* values referring to APEX 79 1000mm



APEX 79
without switch





Code	Model	Watt & Volt
on request*	UHE (280 LED/m)	10W/m @ 24Vdc

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

* Codes will be provided according to the length requested.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

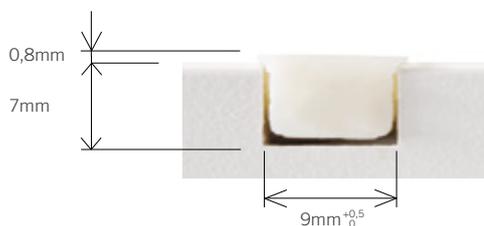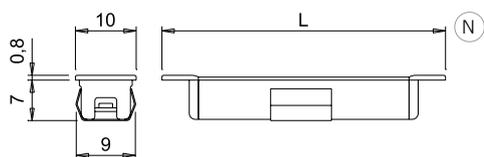

APEX 79 is designed for recessed installation in a blind milled groove which is 9mm wide and 7mm deep. **APEX 79**'s unique shape hides the irregular edges of the groove.



SMART FITTING SYSTEM

APEX 79 is equipped with a smart fitting system using a steel clip with lateral pressure. This allows the profile to be installed rapidly without the need for glues, and the profile can easily be removed from the groove when necessary.

For LED converters and accessories consult the **Domus Extra catalogue** also available on www.domusline.com.

