



BLADE-IN

Domus Line
design

Recessed aluminium LED profile

Materials:

aluminium, polycarbonate

Finishes:

aluminium, black matt

Light source:

UHE LED module (280 LED/m)

Wiring:

2000mm


Application type:

wardrobes, kitchen larder


Installation:

recessed

BLADE-IN is a profile of only 9.5mm thick, characterised by an asymmetrical light projection, obtained with a "groove" configuration that shields the screen to cancel out the glare effect. Designed for recessed installation, the profile has a unique shape that hides the irregular edges of the groove (mouse-bite). It is available in UHE version (280 LED/m) and it is suggested for installation on the sides of wardrobes and kitchen tall units.



Colour appearance	natural white
Colour temperature	4000 K
Luminous efficiency	82 lm/W
CRI	Ra ≥ 80



Colour appearance	warm white
Colour temperature	3000 K
Luminous efficiency	82 lm/W
CRI	Ra ≥ 80

* values referring to BLADE-IN UHE 1000mm



BLADE-IN UHE HI DX

without sensor



Code	Model	Watt & Volt
*on request	UHE (280 LED/m)	10W/m @ 24Vdc

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.


* Codes will be provided according to the length requested.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

Code	Finish
05	aluminium
32	black matt

Code	Light colour
N	natural white
B	warm white

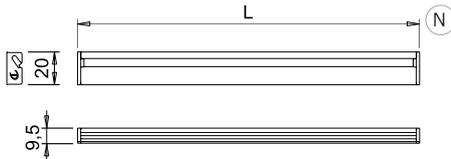

BLADE-IN UHE HI SX

without sensor

Code	Model	Watt & Volt
*on request	UHE (280 LED/m)	10W/m @ 24Vdc

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.


* Codes will be provided according to the length requested.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.


Code	Finish
05	aluminium
32	black matt

Code	Light colour
N	natural white
B	warm white

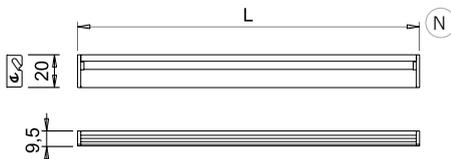

BLADE-IN HI is designed for recessed installation in a blind or through milled groove which is 20mm wide and 9,5mm deep.

BLADE-IN HI's unique shape hides the irregular edges of the groove (mouse-bite).

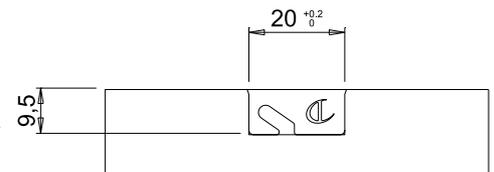

BLADE-IN UHE HI DX

Configured for vertical installation inside the closet on the right side, with upper power cord output. Light projection towards the inside of the cabinet.



BLADE-IN UHE HI SX

Configured for vertical installation inside the closet on the left side, with upper power cord output. Light projection towards the inside of the cabinet.

FINISHES



ALUMINIUM (code 05)



BLACK MATT (code 32)

For power supplies and accessories browse the **Domus Extra catalogue**.

