



MICY

Domus Line design

Recessed LED profile

Materiali:

aluminium, polycarbonate, thermoplastic polymers

Finishes:

white

Light source:

SHE LED module (55 LED/ft - 180 LED/m)
HE WHC LED module (42 LED/ft - 140 twin LED/m)

Wiring:





79" (2000mm)

Application:


under cabinet, under shelf

Installation:


recessed



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 75 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3000 K
Luminous efficiency 75 lm/W
CRI Ra ≥ 80



Colour appearance
Colour temperature
Luminous efficiency
CRI

* values referring to MICY SHE 44-31/64" (1130mm)



MICY SHE TD


with touch dimmer switch



Code	Length	Watt & Volt
1332201_*/SHE	14-61/64" (380mm)	4,3W @ 24Vdc
1332301_*/SHE	20-55/64" (530mm)	6,5W @ 24Vdc
1332401_*/SHE	32-43/64" (830mm)	10,8W @ 24Vdc
1332501_*/SHE	44-31/64" (1130mm)	15,1W @ 24Vdc

Code	Light colour*
N	natural white
B	warm white
B1	super warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY

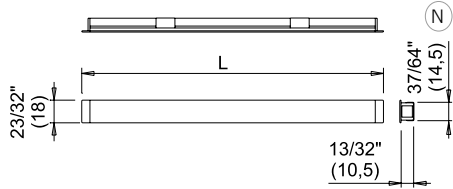

N This drawing shows the profile's overall dimensions. See installation manual for more details.

This profile integrates a stripled with OSRAM Opto Semiconductors diodes.



MICY SHE TD has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".



MICY HE TD WHC


with touch dimmer switch



Code	Length	Watt & Volt
1332201/HE	14-61/64" (380mm)	2,9W @ 24Vdc
1332301/HE	20-55/64" (530mm)	4,3W @ 24Vdc
1332401/HE	32-43/64" (830mm)	7,2W @ 24Vdc
1332501/HE	44-31/64" (1130mm)	10,1W @ 24Vdc

Code	Light colour*
N	natural white
B	warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY

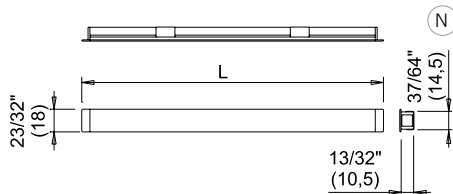


N This drawing shows the profile's overall dimensions. See installation manual for more details.



MICY HE TD WHC integrates a white changeable LED strip which, using the touch switch, can configure two colour temperatures (NW_natural white and WW_warm white). The selection is memorised and can be changed at any time.

MICY is a symmetrically projecting profile for recessed installation. **MICY** integrates a touch dimmer switch for switching on or off or controlling the brightness. **MICY** is equipped with a smart fitting system using steel clips with lateral pressure.

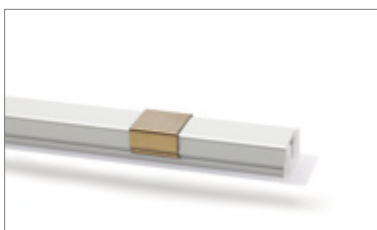

FOR POWER SUPPLIES AND ACCESSORIES SEE PAGE 200.