






### FLEXYLED HE8B

flexible linear LED module

| Length | Watt   | Volt  |
|--------|--------|-------|
| 20mm   | 9,6W/m | 24VDC |

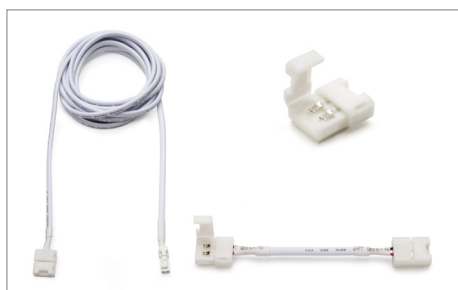

On request, a Plug&Play cable system, named CH is available, which allows you to create custom lengths of FLEXYLED HE8B from the roll without the need for complicated wire soldering. The set has a 2000 mm power cord, a connector for continuous installation and interconnection cables of various lengths.

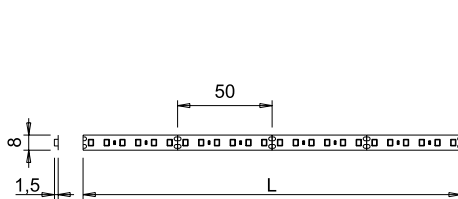

\* values referring to FLEXYLED HE8B 1000mm 4000 K

|                            | super warm white | natural white | D-MOTION white |
|----------------------------|------------------|---------------|----------------|
| <b>Colour appearance</b>   | super warm white | natural white | D-MOTION white |
| <b>Colour temperature</b>  | 2700 K           | 3000 K        | 4000 K         |
| <b>Luminous flux</b>       | 820 lm/W         | 840 lm/W      | 880 lm/W       |
| <b>Luminous efficiency</b> | 85 lm/m          | 87 lm/m       | 91 lm/m        |
| <b>CRI</b>                 | Ra 90            | Ra 90         | Ra 90          |

## FLEXYLED HE8B

### flexible linear LED module



FLEXYLED HE8B is a dimmable light source developed on a 120 LED/m flexible linear module on a circuit 8mm wide with adhesive base, designed for installation in profiles with a removable diffuser. The module, which can be divided at 50 mm (6 LED) intervals, features reinforced soldered power supply cable terminals which ensure good solidity. FLEXYLED HE8B is available in 20m long rolls without power cable. Modules in customised lengths with 2000 mm power cable and Micro24 connector are available on request. Power supply not included. To be ordered separately.